

Evaluation kit for quasi-static MEMS scanners

Complete evaluation kit "QSDrive Scan Kit"

The Evaluation Kit "QSDrive Scan Kit" enables customers, especially small and medium-sized companies, to evaluate and correctly drive ResoLin MEMS scanners from Fraunhofer IPMS without having to develop the required driving electronics themselves.

The kit consists of a ResoLin device (a cardanic MEMS scanner with a linear axis and an optional, orthogonally-oriented resonant axis) as well as control electronics to operate components with an optimized trajectory. A scanning head, which due to its special design can be easily integrated into popular optical test setups, is also included.

Controlled operation as well as the synchronized operation of the resonant axis are possible depending on the specific design of the MEMS component. Function control is realized using a software GUI that allows communication via USB interface.





Contact

Dr. Markus Schwarzenberg +49 351 8823-294 markus.schwarzenberg@ ipms.fraunhofer.de

Fraunhofer Institute for Photonic Microsystems IPMS Maria-Reiche-Str. 2 01109 Dresden Germany

www.ipms.fraunhofer.de

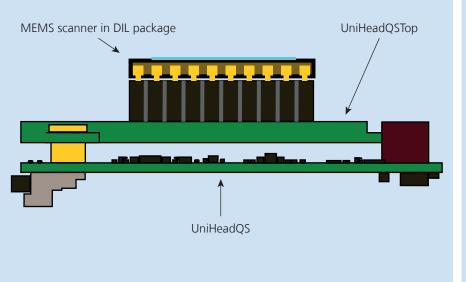



Side view of the scan head, schematized

Dimensions of the driver board

Components

- **Driver Board** "QSDrive02A" basic driving and controlling unit
- Scan Head consisting of the following components:
 - MEMS scanner, type selected in agreement with customer
 - UniHeadQSTop: hosts a small PCB board with a socket for the DIL packaged scanner or directly mounted MEMS. The wiring is specifically chosen for the selected MEMS scanner type.
 - UniHeadQS: signal conditioning and pre-amplification (driving and sensor signals) and persistent parameter storage for the individual MEMS scanner.
 The UniHeadQSTop is plugged into this module.

Driver Board and Scan Head are connected using FFC cables of appr. 8" length.

Power	su	pply	
c		D	ı

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
V _{s_IN}	Supply voltage		11.5	12	12.5	V
I _{s in}	Supply current	(Max. = Starting current)		0.4	2.0	Α

Driving parameters of linear drive axis

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
V _{outQS}	Output voltage (quasi-static)		0		200	V
l _{outQS}	Output current (quasi-static)				3	mA
f _{s_vt}	Sampling frequency	Voltage trajectory			50	kHz
f _{s_OL}	Sampling frequency	Angular ("theta") trajectory, open loop			20	kHz
		control				
f _{s_CL}	Sampling frequency	Angular ("theta") trajectory, closed loop			12	kHz
		control				

Driving parameters of resonant drive axis

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
VoutRES	Output voltage (resonant)		24		200	V